



by JH INDUSTRIES, INC.

1981 EAST AURORA RD.  
TWINSBURG, OH 44087

PH: 330-963-4105 · 800-321-4968

[www.copperloy.com](http://www.copperloy.com)

# DOCK-TO-GROUND RAMP



Dock-to-Ground ramps are ideal for use in material handling situations where freight needs to travel from the grade level to dock height. Ramp widths can range from 60-inches to 12-feet wide. Capacities can range from 12,000 lbs. to 80,000 lbs. The ramps are designed to be installed quickly and can accommodate just about any unique loading application. Unlike concrete ramps, our dock-to ground ramps can be relocated when needed.

## RAMP FEATURES:



**15" LIP**– The ramp is designed with a 15-inch lip that rests on the dock. This design allows the ramp to flex as loads move up and down the ramp.



**LOW END PLATE** – 36" long. Approach plate is beveled from the underside to provide a smooth ground-level entry, eliminating jolts and bumps when forklifts travel on and off the ramp.



**DECK GRATING AND CURB** – Grating is constructed of electro-forged serrated steel for superior strength and traction. Seven inch curb height prevents accidental vehicle runoff.



**CHAINS/BRACKETS**– Chains and brackets are provided on every dock-to-ground ramp. Once the brackets and chains are securely fastened to the face of the dock the ramp is ready for use.

## OPTIONAL FEATURES:




**OPTIONAL:**

**RAMP TO PLATFORM** – A dock-to-ground can be attached to any size platform. This can create an instant loading dock facility



**OPTIONAL:**

**SOLID/PNEUMATIC TIRES** – Premium 18” tires can be added to most dock-to-ground ramps. The solid tires are maintenance free. The tires are ideal if the ramp needs to be moved.

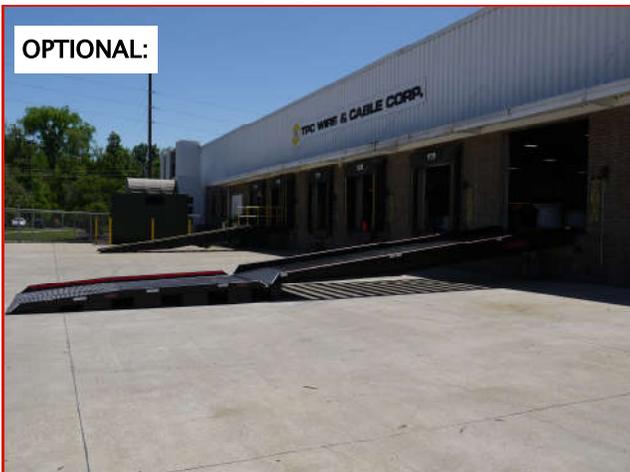

**OPTIONAL:**

**CUSTOM RAMP** – Custom ramps can be designs for special applications. Special applications may include low clearance vehicles, wide vehicles or dock aprons.



**OPTIONAL:**

**HANDRAILS**– Handrails can be added to any ramp at any length required. 42-inch in high split handrail are constructed in all steel. Reflective tape is added for additional safety.